CURB & GUTTER

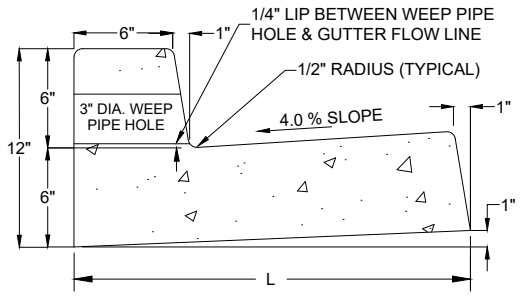

GUTTER PAN LENGTH (L)

- STANDARD GUTTER PAN - 24"
- EXTENDED GUTTER PAN - 30"

EXTRUDED CURB

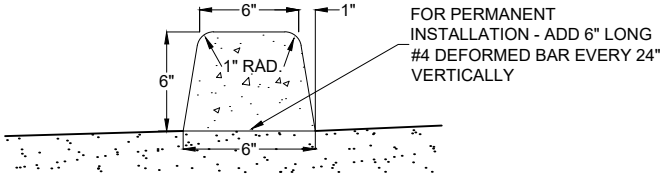

STANDARD CURB

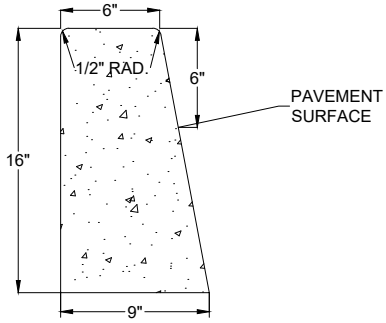

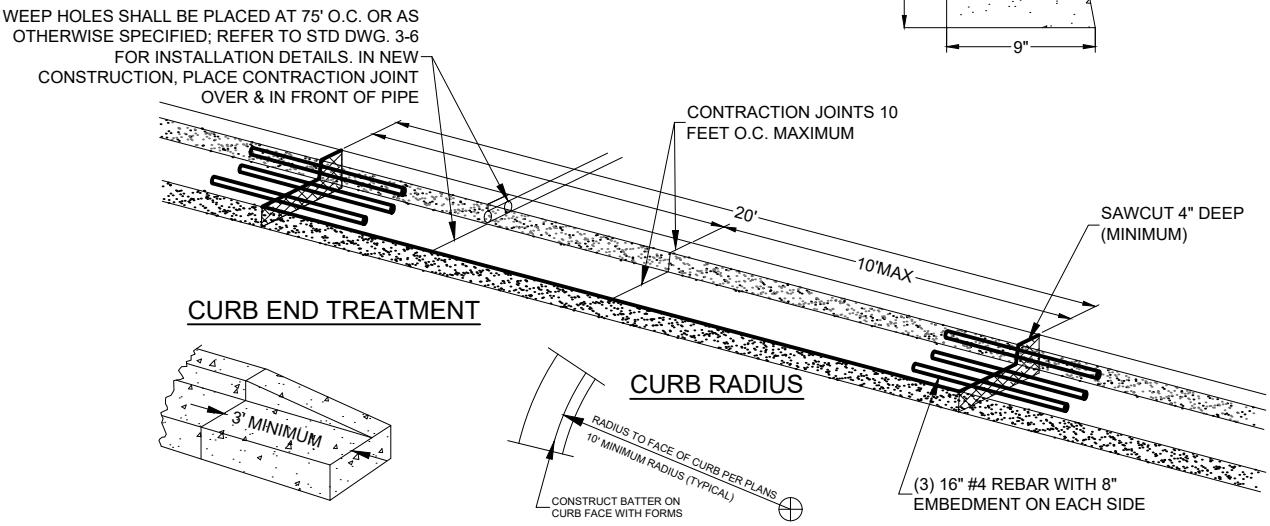

CURB END TREATMENT

CURB RADIUS

NOTES

- WHERE CONCRETE PAVEMENT WILL BE USED, CONTRACTION JOINTS SHALL BE PLACED TO MATCH TRANSVERSE CONTRACTION JOINT LOCATIONS IN STREET PAVEMENT AND 16" #4 REBAR TIE BARS SHALL BE PLACED IN GREEN CONCRETE.
- CURB AND GUTTER SURFACES SHALL HAVE A BROOM FINISH PARALLEL TO THE LENGTH OF THE CURB.
- SIDEWALKS, ACCESS RAMPS, AND RESIDENTIAL DRIVEWAYS SHALL BE 3000 PSI FIELD STRENGTH (3450 PSI LAB STRENGTH) 6.0 SACK MIX CONCRETE.
- CURBS AND COMMERCIAL DRIVEWAYS SHALL BE 3500 PSI FIELD STRENGTH (4025 PSI LAB STRENGTH) 6.3 SACK MIX CONCRETE

REGISTERED PROFESSIONAL ENGINEER
70925PE
Stanley A Petroff
Digitally signed by Stanley A Petroff
Date: 2025.09.24 15:26:55-07'00'
OREGON
JUNE 14, 2007
STANLEY A. PETROFF

EXP DATE: 12-31-2026

SPRINGFIELD OREGON

CURBS

NO	REVISION	DATE	BY	APPR.
1	CITY DWG. 3-5			
2	DRAWING UPDATE	09/2022	TG	
3	DRAWING UPDATE	04/2024	JG	
4	DRAWING UPDATE	09/2025	JG	

STANDARD DRAWING
3-5
2025