SEWER CLEANOUT SURFACE DETAIL

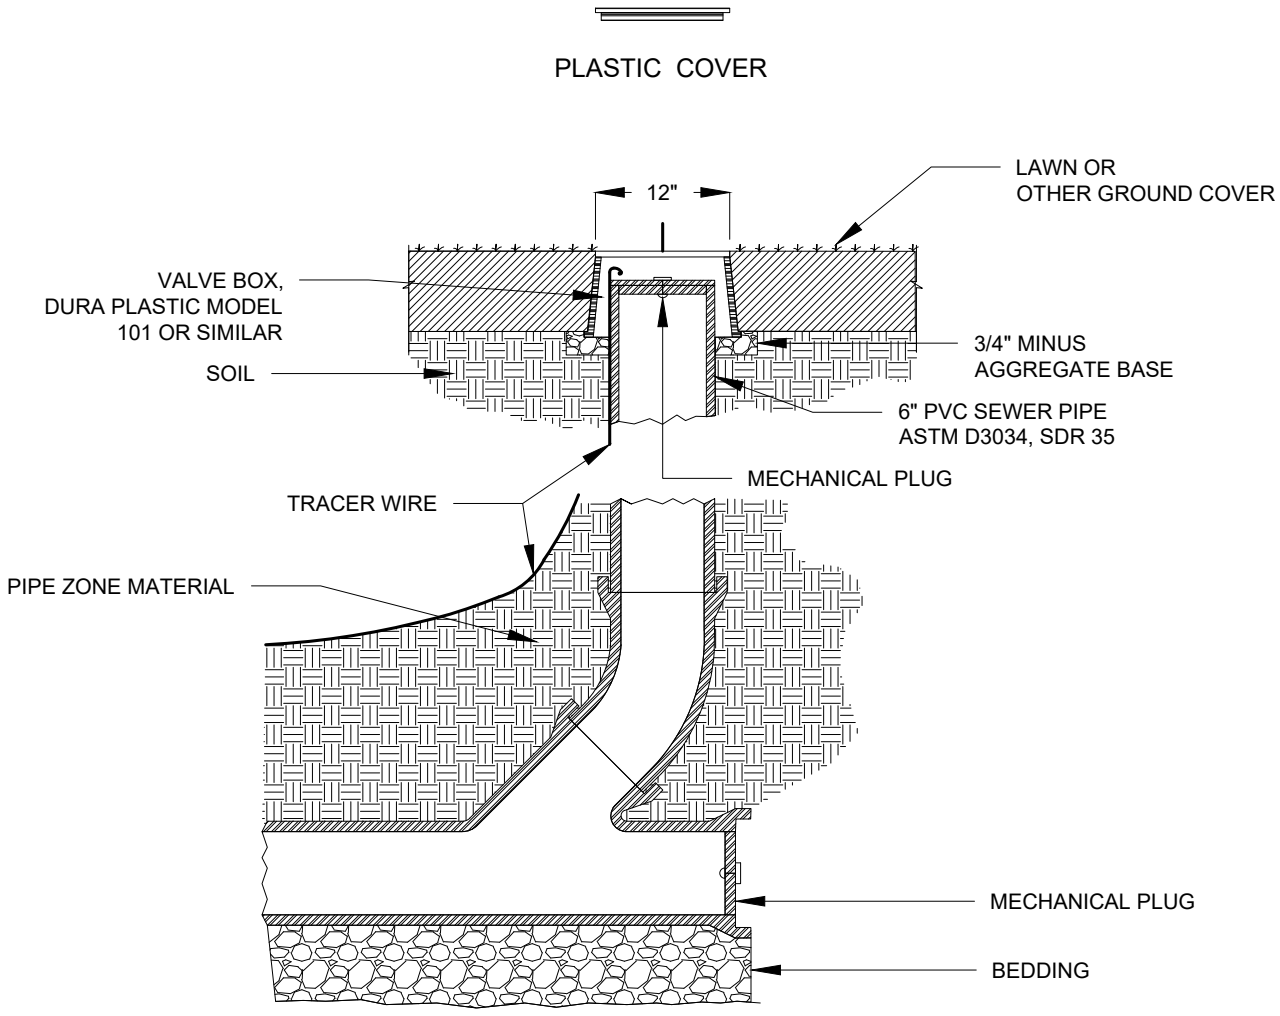

NOTES

- CLEANOUT BOXES SHALL BE CENTERED DIRECTLY OVER THE STANDPIPE IN A VERTICAL POSITION.
- CLEANOUT BOXTOP SHALL BE ADJUSTED TO MEET THE FINISHED GRADE.
- PVC PIPE SHALL BE ONE CONTINUOUS PIECE WITH NO BELLS OR COUPLERS.
- LEAVE ENOUGH TRACER WIRE TO EXTEND 18" ABOVE CAST IRON COVER.

REGISTERED PROFESSIONAL ENGINEER
70925PE
Stanley A Petroff
Digitally signed by Stanley A Petroff
Date: 2025.10.20 10:16:54-07'00'
OREGON
JUNE 14, 2007
STANLEY A. PETROFF

EXP DATE: 12-31-2026

SPRINGFIELD OREGON

SEWER CLEANOUT DETAIL YARD INSTALL

NO	REVISION	DATE	BY	APPR.
1	CITY DWG. 4.4C			
2	DRAWING UPDATE	10/2025	JG	

STANDARD DRAWING
4-4C
2025